


## EPDM Mulch – The long life surface configuration in a natural design

»A hygienic  
and economical  
alternative«





# Reinvent surfaces with EPDM Mulch

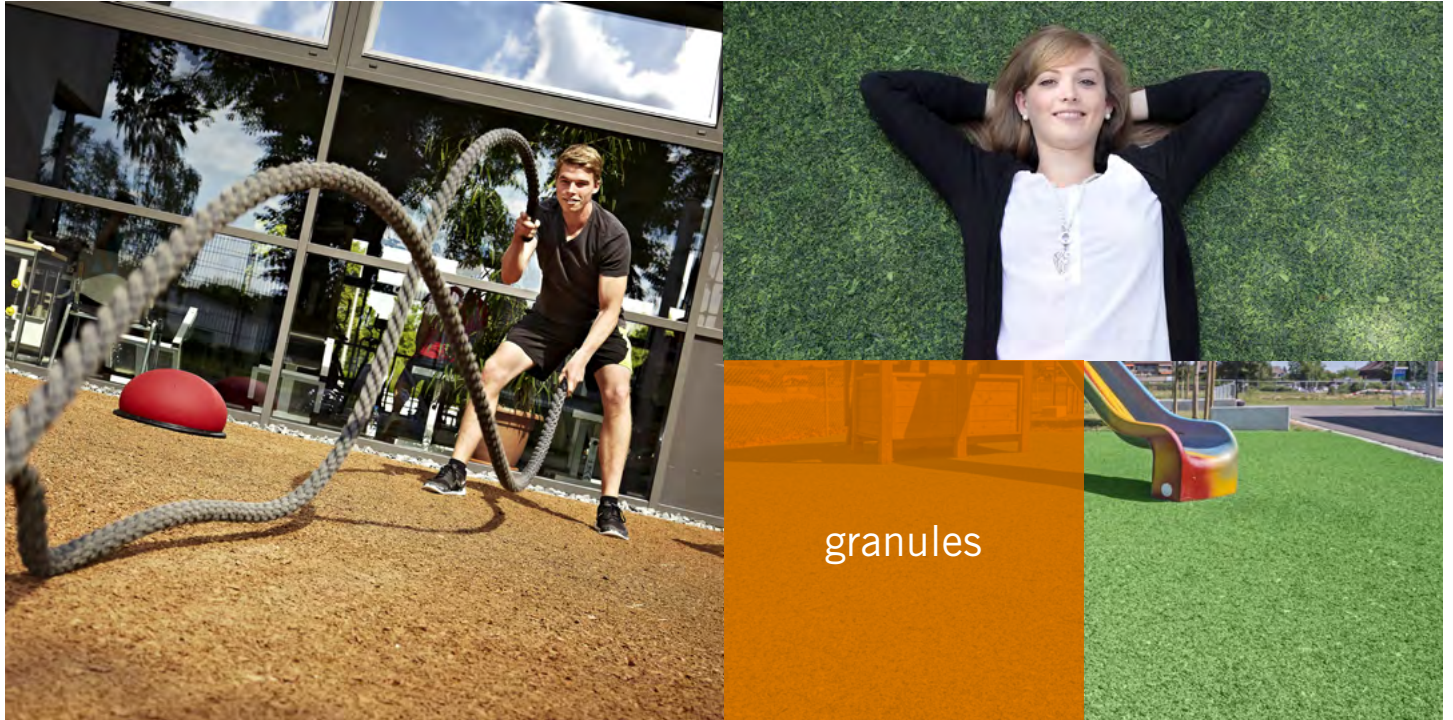

## » The hygienic and economical alternative

EPDM Mulch is the alternative for rubber mulch produced from old tyres with surface coating. EPDM Mulch is 100% dyed through, which means it keeps its colour over the long term and is environmental and health-friendly.

Bark mulch and wood chips are substantially more prone to become dirty. Soiling can be more easily covered by loose pieces of wood, or overseen during cleaning. Soiling is visible on a hardened EPDM Mulch surface and is therefore easy to clean.


Bound EPDM Mulch surfaces are easier to maintain and offer a consistent level of safety. Loosely spread materials such as bark mulch and wood cuttings can rot, be removed and require substantially more care. EPDM Mulch is suitable for single-layered as well as for double-layered system constructions. Double-layered systems are installed with a shock-absorbing elastic base layer made of SBR Granules and fibres in a grain size of 1.0 - 8.0 mm.



EPDM Mulch 100% dyed through



Coated rubber mulch made from old tyres

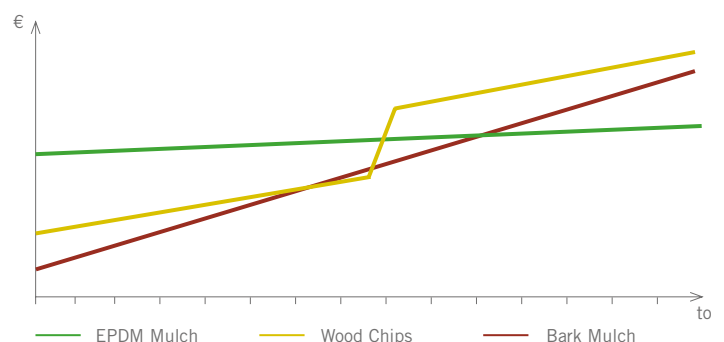

# EPDM Mulch – durable, safe, economical

EPDM Mulch is optimally suitable for everyone who is looking for a durable, colour-resistant alternative to rubber mulch made from old tyres.

EPDM Mulch is manufactured as a virgin product and is 100% dyed through. This means that its colour doesn't 'wear out' – even after several years. EPDM Mulch doesn't give off disturbing odors and poses no risk to human health.

Compared with natural varieties of mulch, EPDM Mulch does not rot away, it remains in place and therefore offers hygienic and consistently safe playing conditions.



## » Consistent safety

Depending on its installation height, EPDM Mulch can provide a protective function aligned to the required fall height when it is used in the area of leisure and play areas.



## » Flame-retardant

Available as a flame-retardant material according to class C<sub>fl</sub>-s<sub>1</sub> (DIN EN 13501-1). Referring to this it is suitable for indoor use.



## » 100% dyed through and stable

EPDM Mulch surfaces remain colour and feature stable in every weather and when subject to considerable mechanical strain.




## » Environmentally compatible & health-friendly

EPDM Mulch consists 100% of a controlled virgin product and satisfies all of the relevant environmental protection requirements.




## » Sustainable & economical

Very durable, no discharge, no follow-up spreading, no hidden costs, and therefore sustainable and economical.



## » Barrier-free

EPDM Mulch is laid down joint-free and therefore offers the basis for limitless playing without trip hazards or barriers.



## » Long term, expedient use of resources

Due to the natural form of material, EPDM Mulch achieves a superb bulk density.



## » Hygienic virgin product

Fungus and bacteria don't stand a chance. Unwanted soiling can be discovered and disposed of more quickly.



» Available colours



**Red**  
Code: 46 0095  
RAL: 3016



**Beige**  
Code: 46 2195  
RAL: 1001



**Brown**  
Code: 46 2895  
RAL: 8024



**May Green**  
Code: 46 4195  
RAL: 6017



**Rainbow Green**  
Code: 46 5695  
RAL: 6025



**Blend Red-Brown**  
Code: 46 2896  
RAL: 3016 + 8024



**Blend Beige-Brown**  
Code: 46 2196  
RAL: 8024 + 1001



**Blend Green**  
Code: 46 4196  
RAL: 6017 + 6025



EPDM Mulch is available ex works in five different colours. The blends are each made up of 50% of the corresponding colour and come readily blended.

RAL - Approx. value<sup>1</sup>







# ALWAYS VIRGIN MATERIAL

Rain and sun: no problem!  
A genuinely top quality product stays great for many years.  
**Our EPDM Mulch provides the proof.**





**GREAT  
VALUE**  
HAS NEVER BEEN  
SO NEW BEFORE!  
EPDM MULCH

granules



80500045-07/2015

**melos** 

Melos GmbH  
Granules  
Cable Compounds  
Customer Solutions  
Bismarckstrasse 4-10  
49324 Melle | Germany  
Phone +49 54 22 94 47-0  
Fax +49 54 22 59 81  
info@melos-gmbh.com  
www.melos-gmbh.com